D.Card

POE2P40W




Specifications


Model	• POE2P40W1P • POE2P40W2P
Dimension	• 138 x 32mm
External IO	• 1 x EXT PWR SW • 1 x EXT RST SW • 2 x EXT PWR/HDD 訊號燈
Internal IO	• 1 x INT 1*2 pin header for connecting MF32 MB Lan PoE function • 1 x INT 2*4 pin Front panel header (P=2.54mm) • 1 x INT 1*4 pin Wafer (P=2.54mm) • 2 x INT 1*6 pin Hole (P=2.54mm) for Silvertel Ag6120 module • 1 x INT 1*5 pin Hole (P=2.54mm) for Silvertel Ag7100 module output • 1 x INT 1*8 pin Hole (P=2.54mm) for Silvertel Ag7100 module input
Power Output	• POE2P40W1P >>>24V/1.6A • POE2P40W2P >>> 24V/3.2A
Temperature	• Operating Temperature: 0 ~ 50° C • Storage Temperature: -20 ~ 70° C • Humidity: 10% ~ 90% RH @40°C (non-condensing)


* Specifications subject to change without notice, not responsible for typographical errors. Does not include HDD or OS.

POE2P40W1P	POE2P40W2P
	

ITEM	DATE	MODIFY CONTENT	DESIGN	CHECK	APPROVE

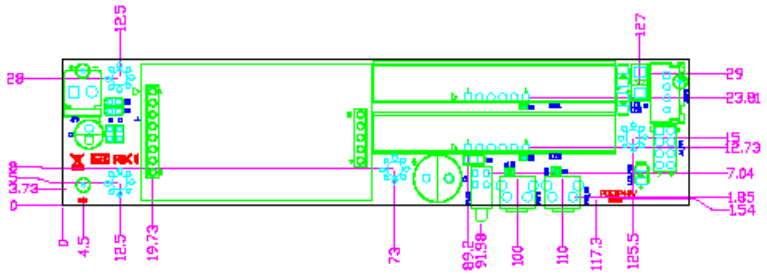

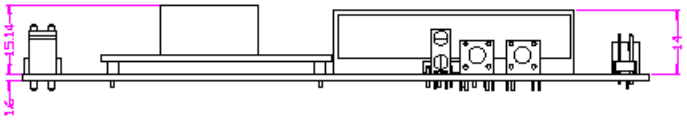

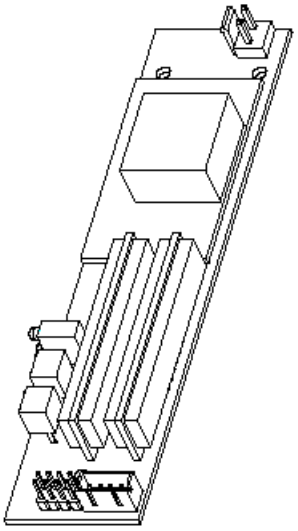

Jetway Information Co.Ltd				
Model: POE2P40WR10			Qty: 10	
Date: [illegible]			Size: [illegible]	
Layer: [illegible]			Unit: [illegible]	

SIZE A4				
VER. V 1.0			DATE 2024.10.04	
捷波資訊股份有限公司 Jetway Information Co.,Ltd	TITLE POE2P40WR10	MATERIAL	TOLERANCE	APPROVE / CHECK / DESIGNER
		FINISH		
	PART No.	Q'TY 1 /SET	PAGE 1/1	XX.X = ±0.1 XX.XX = ±0.05
	DRAW No. POE2P40WR10	UNIT mm	SCALE 1/1	Joe